




Rec'd PCT/PTO 08 FEB 2005
PCT/IB 03/03350 #2
29.07.03

INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

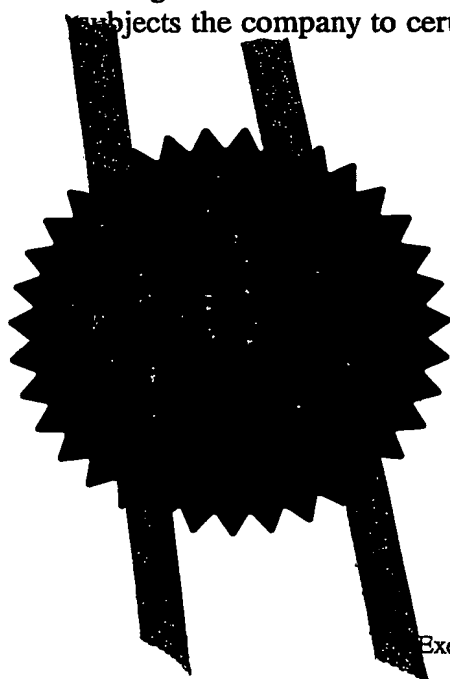

Signed

Dated 16 May 2003

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Patents Form 1/77 PATENT OFFICE

Patents Act 1977
(Rule 16)

16 AUG 2002

RECEIVED BY FAX

The
Patent
Office
1100110

1/77

0219138.5

Request for grant of a patent
(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

16AUG02 E741719-2 00 Cardiff Road

P01/7700 0.00-021913 Newport

Gwent NP10 8QQ

1. Your reference

PHGB020134

2. Patent application number
(The Patent Office will fill in this part)

0219138.5

16 AUG 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

KONINKLIJKE PHILIPS ELECTRONICS N.V.
GROENEWOUDSEWEG 1
5621 BA EINDHOVEN
THE NETHERLANDS

Patents ADP Number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

THE NETHERLANDS

7419294001

4. Title of the invention

COMMUNICATION SYSTEM

5. Name of your agent (if you have one)
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Kevin James SCOTT
Philips Intellectual Property and Standards
Cross Oak Lane
Redhill
Surrey RH1 5HA

Patents ADP number (if you know it)

7688914002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority Application number
(if you know it)Date of filing
(day/month/year)

GB

0218737.5

13.08.2002

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:

YES

- a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d))

Patents form 1/77

Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description

Claims(s)

Abstract

Drawings

12

4

1

5

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and

search (*Patents Form 9/77*)

Request for substantive examination

(*Patents Form 10/77*)

Any other documents

(*Please specify*)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date 16th August 2002

2. Name and daytime telephone number of person to contact in the United Kingdom

01293 815281

(Kevin J. Scott)

Warning

For an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be warned if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been given.

S

If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505. Write your answers in capital letters using black ink or you may type them.

If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

If you have answered "Yes" Patents Form 7/77 will need to be filed.

Once you have filled in the form you must remember to sign and date it.

For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTION**COMMUNICATION SYSTEM**

5 The present invention relates to a communication system and further relates to primary and secondary stations for use in such a system and to a method of operating such a system. While the present specification describes a system with particular reference to the Universal Mobile Telecommunication System (UMTS), it is to be understood that such techniques are equally
10 applicable to use in other communication systems.

 There is a growing demand in the mobile communication area for a system having the ability to download large blocks of data to a Mobile Station (MS) on demand at a reasonable rate. Such data could for example be web
15 pages from the Internet, possibly including video clips or similar. Typically a particular MS will only require such data intermittently, so fixed bandwidth dedicated links are not appropriate. To meet this requirement in UMTS, a High-Speed Downlink Packet Access (HSDPA) scheme is being developed which may facilitate transfer of packet data to a mobile station at up to 4Mbps.

20 A conventional component of a packet data transmission system is an ARQ (Automatic Repeat reQuest) process, for handling data packets received in error. For example, consider downlink packet transmission from a Base Station (BS) to a Mobile Station (MS) in HSDPA. When the MS receives a data packet it determines whether the packet has been corrupted, for example
25 using Cyclic Redundancy Check (CRC) information. It then transmits a signal in a field allocated for this purpose to the BS, with a first signal used as an acknowledgement (ACK), to indicate that the packet was successfully received, and a second signal used as a negative acknowledgement (NACK), to indicate that the packet was received but corrupted. The signals may for
30 example be different codewords or the same codeword transmitted at different powers. The BS requires an appropriate position for a decision threshold to be set so that it can decode the ACK/NACK messages correctly.

Since packet transmission is typically intermittent, discontinuous transmission (DTX) may typically be employed, so that nothing is transmitted by the MS in the ACK/NACK field unless a data packet has been received. In a typical scenario, the probability of the MS failing to detect a data packet that has been sent might be 1%. In this case it is desirable for the BS to interpret the DTX as if it were a NACK, so that the packet may be retransmitted to the MS. Interpreting DTX as a NACK may be achieved either by offsetting the decision threshold at the BS towards the ACK signal, or by means of the MS transmitting a NACK in every ACK/NACK field which does not correspond to a packet with correct CRC, whether or not a packet was detected.

A problem with the MS transmitting in every ACK/NACK field is that uplink interference is significantly increased, and in addition MS battery life is reduced. This is a particular problem when the packet traffic is bursty (as is often the case), resulting in the MS being required to transmit in many ACK/NACK fields when no packet had been transmitted to it.

A problem with offsetting the threshold for deciding between ACK and NACK commands is that the transmit power of the ACK command needs to be increased (as discussed below) in order to achieve an acceptably low probability of an ACK being interpreted as a NACK. As the probability of the MS transmitting an ACK should be much greater than that of transmitting a NACK in a well-designed communication system, increasing the ACK transmit power will significantly increase the average transmit power required in the ACK/NACK field.

Consider a typical communication system which requires that the probability of misinterpreting an ACK as a NACK is less than 1% and the probability of misinterpreting a NACK as an ACK is less than 0.01%. Assuming that the probability of the MS not detecting a packet is 1%, then the probability of misinterpreting DTX as a NACK should be less than 1% (so that the combined probability of the MS not receiving a packet and its DTX being interpreted as an ACK is the same as the probability of misinterpreting a NACK as an ACK, i.e. less than 0.01%). Simulations for typical mobile communication channels have shown that offsetting the decision threshold towards ACK

enough to ensure that the probability of misinterpreting DTX as an ACK is less than 1% has the effect of requiring the ACK power to be greater than the NACK power, by as much as 10 or 20dB in some scenarios.

One partial solution, disclosed in our co-pending United Kingdom patent application 0207696.6 (Applicant's reference PHGB 020034), is for the MS to transmit NACKs continuously after its initial ACK/NACK for as long as a timer is running. This avoids the need for the BS to offset its decision threshold, thereby reducing the required ACK power. However, a problem with this scheme is that the BS still has to offset its ACK/NACK decision threshold for the first of a series of packets, or alternatively tolerate a higher mis-detection probability for DTX after the first packet.

An object of the present invention is to address the above-identified problem.

According to a first aspect of the present invention there is provided a communication system having a downlink indicator channel for the transmission of a indicator signal indicating that a data packet is scheduled to be transmitted on a downlink data channel from a primary station to a secondary station, the secondary station having receiving means for receiving the indicator signal and the data packet, and acknowledgement means for transmitting a signal to the primary station to indicate the status of the received data packet, wherein the secondary station comprises means for transmitting on an uplink channel a status signal to indicate receipt of the indicator signal before transmission of a positive or negative acknowledgement to indicate the status of the received data packet.

By arranging for the secondary station to transmit a status signal to indicate reception of the indicator signal, the primary station has at least two chances to detect the case where the secondary station fails to receive the indicator signal (i.e. the primary station receiving nothing in both the time slot for receipt of the initial status signal and also receiving nothing in the time slot for an ACK or NACK in response to receipt of the data packet. Hence, the probability of the primary station misinterpreting DTX as an ACK or NACK is

reduced and the peak power requirement of the uplink channel can be reduced, thereby reducing interference levels. In a preferred embodiment of the present invention, the status signal is a NACK.

According to a second aspect of the present invention there is provided
5 a primary station for use in a communication system having a a downlink
Indicator channel for the transmission of a Indicator signal indicating that a
data packet is scheduled to be transmitted on a downlink data channel from
the primary station to a secondary station, wherein means are provided for
receiving on an uplink channel a status signal from the secondary station to
10 indicate receipt of the Indicator signal before reception of a positive or negative
acknowledgement to indicate the status of the data packet received by the
secondary station.

According to a third aspect of the present invention there is provided a
secondary station for use in a communication system having a downlink
15 indicator channel for the transmission of a indicator signal indicating that a
data packet is scheduled to be transmitted on a downlink data channel from a
primary station to the secondary station, wherein receiving means are provided
for receiving the indicator signal and the data packet, acknowledgement
means are provided for transmitting on an uplink channel a signal to the
20 primary station to indicate the status of the received data packet, and means
are provided for transmitting a status signal to indicate receipt of the Indicator
signal before transmission of a positive or negative acknowledgement to
indicate the status of the received data packet.

According to a fourth aspect of the present invention there is provided a
25 method of operating a communication system having a downlink indicator
channel for the transmission of a indicator signal indicating that a data packet
is scheduled to be transmitted on a downlink data channel from a primary
station to a secondary station, the method comprising the secondary station
receiving the Indicator signal and the data packet, and transmitting on an
30 uplink channel a status signal to indicate receipt of the indicator signal before
transmission of a positive or negative acknowledgement to indicate the status
of the received data packet.

The present invention is based upon the recognition, not present in the prior art, that transmission of a negative acknowledgement on receipt of an indication that a data packet is to be transmitted, together with a positive or negative acknowledgement relating to receipt of the data packet itself, reduces the peak uplink power requirements, thereby reducing system interference.

Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Figure 1 is a block schematic diagram of a radio communication system;

Figure 2 is a diagram illustrating operation of a known stop-and-wait ARQ scheme;

Figure 3 is a diagram illustrating operation of a basic HSDPA packet transmission scheme;

Figure 4 is a diagram illustrating operation of an improved HSDPA packet transmission scheme including repeated NACKs;

Figure 5 is a diagram illustrating operation of an improved HSDPA packet transmission scheme including signalling detection of a packet indication;

Figure 6 is a diagram illustrating operation of an improved HSDPA packet transmission scheme including signalling detection of a packet indication and repeated NACKs;

Figure 7 is a graph showing peak power requirement for the schemes of Figure 3 (shown as a solid line) and Figure 6 (shown as a dashed line); and

Figure 8 is a flow chart showing a method of operating a packet data transmission system in accordance with the present invention.

In the drawings the same reference numerals have been used to indicate corresponding features.

Referring to Figure 1, a radio communication system comprises a primary station (BS) 100 and a plurality of secondary stations (MS) 110. The BS 100 comprises a microcontroller (μ C) 102, transceiver means (Tx/Rx) 104

connected to antenna means 106, power control means (PC) 107 for altering the transmitted power level, and connection means 108 for connection to the PSTN or other suitable network. Each MS 110 comprises a microcontroller (μ C) 112, transceiver means (Tx/Rx) 114 connected to antenna means 116, and power control means (PC) 118 for altering the transmitted power level. Communication from BS 100 to MS 110 takes place on a downlink channel 122, while communication from MS 110 to BS 100 takes place on an uplink channel 124.

An example of the operation of a known stop-and-wait ARQ scheme is illustrated in Figure 2. Data packets 202, identified as P_n where n is a one-bit sequence number, are transmitted in allocated time slots on a downlink channel (DL) 122 from a BS 100 to a MS 110. The first data packet P_0 , with sequence number 0, is received in a corrupted state by the MS 110, which therefore transmits a negative acknowledgement (N) 204 in a field reserved for transmission of positive and negative acknowledgements. In response to this the BS 100 retransmits the first data packet 202, which this time is received correctly by the MS 100 which transmits an acknowledgement (A) 206. The BS 100 then transmits the next packet, with sequence number 1. The BS 100 also retransmits a data packet 202 if it receives no acknowledgement within a predetermined time-out period (in case the MS 110 did not receive the packet at all or the acknowledgement was lost). If the MS 110 did in fact receive the previously transmitted packet 202 it can determine that the received packet 202 is a retransmission as it has the same sequence number as the previous packet.

Operation of HSDPA as currently-specified is shown in Figure 3, which shows in simplified form approximate timing relationships between the various channels used to provide HSDPA. Presence of a data packet 202 scheduled for transmission to the MS 110 is signalled by transmission of an Indicator signal I 302 in sub-frame N of a downlink Indicator channel DL_1 (the High Speed Shared Control CHannel, HS-SCCH). This is followed by transmission of the data packet P 202 on a downlink data channel DL_2 (the High Speed Downlink Shared CHannel, HS-DSCH). If the MS 110 correctly decodes the

packet 202 it sends an ACK 206 in sub-frame N of an uplink channel, a High Speed Dedicated Physical Control CHannel (HS-DPCCH), as shown. If the packet is not correctly decoded, a NACK 204 is sent instead.

If the MS 110 fails to detect the indicator signal 302, it will not transmit
5 anything (i.e. it uses Discontinuous Transmission, DTX) in sub-frame N of the uplink channel 124. If the BS 100 then wrongly detects the DTX as an ACK 206, the BS will not perform a physical-layer retransmission of the packet. This means that higher-layer protocols are required if the MS 110 is to be able to receive correctly the missed packet; however, such protocols generate
10 significant extra signalling traffic (and hence more interference) and may be too slow for real-time applications.

In order for the BS to limit the probability of wrongly detecting DTX as ACK 206 (a probability of 0.01 seems to be considered acceptable), it must offset its ACK/NACK decision threshold to favour detection of NACKs.
15 However, this means that the power required for ACK messages is increased, and can be as high as 10-20dB above that required for a normal uplink DPCCH.

A partial solution to this problem, disclosed in our co-pending United Kingdom patent application 0207696.6 (Applicant's reference PHGB 020034),
20 is described with reference to Figure 4. In this scheme the MS 110 transmits an ACK 206 (as shown) or NACK 204 in sub-frame N of the uplink channel 124, and then continues to transmit NACKs 204 in every uplink sub-frame corresponding to a HS-DSCH sub-frame in which a packet was not detected via the HS-SCCH, as long as a timer is running. In other words, while the timer
25 is running a NACK 204 is transmitted in sub-frame N of the uplink channel 124 unless a data packet 202 was correctly decoded in sub-frame N of the downlink HS-DSCH. In this way, during contiguous (or nearly contiguous) bursts of packets the BS 100 does not have to offset its detection threshold (except perhaps for the first packet in each burst), thereby reducing the
30 required ACK power.

However, a drawback of this scheme is that the BS 100 still has to offset its ACK/NACK decision threshold for the first packet in each burst, or

else tolerate a higher mis-detection probability for DTX after the first packet. Thus the peak transmit power required for the uplink channel 124 is not improved (unless the BS 100 does not offset its detection threshold for the first packet either, in which case the first packet in each burst will be subject to a higher probability of DTX misinterpretation). Furthermore, if packets only occur individually (i.e. separated by a longer period than the duration of the timer), then the scheme of transmitting NACKs 204 while the timer is running offers no benefit.

An improved scheme, in accordance with the present invention, is described with reference to Figure 5. In this scheme, when the MS 110 detects a packet indication 302 on the downlink indicator channel it transmits a NACK 204 as a status signal in the sub-frame before the sub-frame in which it would normally transmit the ACK 206 or NACK 204 relating to the data packet 202. In the illustrated scenario, an indicator signal 302 is transmitted in sub-frame N of the indicator channel and in response the MS 110 transmits a NACK 204 in sub-frame N-1 of the uplink channel 124 (unless a data packet has been successfully decoded from sub-frame N-1 of the downlink data channel). In other embodiments of the present invention, the status signal need not be a NACK 204. For example, it could be an ACK 206 or some other suitable signal.

Using this scheme, a communication system can be designed so that the probability of the BS 100 failing to detect that the MS 110 has failed to detect a packet indication 302 transmitted on the downlink indicator channel DL₁ is shared between at least two transmissions on the uplink channel 124. Thus if the overall probability of DTX being detected as an ACK 206 is required to be less than 0.01, the power of the NACK transmission in sub-frame N-1 can be set so that the probability of the BS 100 wrongly detecting DTX in sub-frame N-1 as a NACK 204 is 0.1, and the power of the ACK transmission in sub-frame N can be set so that the probability of the BS 100 wrongly detecting DTX in sub-frame N as an ACK 206 is also 0.1. In this way the peak power requirement for the uplink channel 124 is minimised. It follows that the transmit power used for the NACK transmission in sub-frame N-1 may be different

from the transmit power used for other NACKs. In fact, it is preferable for the transmit power used for the NACK transmission in sub-frame N-1 to be the same as the transmit power normally used for ACK transmissions.

In a preferred embodiment, the scheme of Figure 5 can be combined
5 with that of Figure 4. In particular, a special case of the behaviour in Figure 4 may be used, whereby the timer runs for exactly one sub-frame after sub-frame N. Thus when an ACK or NACK has been transmitted in sub-frame N, the MS 110 will always transmit in addition a NACK 204 in sub-frame N+1, unless another packet follows immediately in sub-frame N+1 on the downlink
10 data channel and is decoded correctly. In which case an ACK is transmitted in sub-frame N+1 on the uplink channel 124. Accordingly, the BS 100 never has to distinguish DTX from ACK 206 in one sub-frame alone. A particular advantage of this embodiment the present invention is that the timer does not need to run for longer than one sub-frame to obtain the benefit of the reduced
15 ACK power requirement.

According to the current HSDPA specifications, it is also possible for a system to require ACKs or NACKs to be repeated a number of times (up to three repeats) in subsequent sub-frames in order to increase their reliability without increasing their transmit power. No packets may be transmitted on the
20 downlink data channel in any sub-frame corresponding to a sub-frame on the uplink channel 124 containing a repeat of an ACK/NACK from a previous packet.

In this case, the present invention could be applied so that the MS 110 transmits NACKs 204 in both sub-frame N-1 and sub-frame N-2 on detection
25 of a packet indication on the indicator channel, in order to keep the power required for this preliminary NACK 204 similar to the power required for the normal ACK/NACK transmissions. However, there is not sufficient time between an indicator signal 302 in sub-frame N of the indicator channel and sub-frame N-3 on the uplink channel 124 for a NACK 204 to be transmitted in
30 sub-frame N-3 of the uplink channel in a system where the number of ACK/NACK repeats is set to a value greater than 1.

In such a system, the timer could still be used so as to cause a further NACK 204 to be transmitted after the normal ACK/NACK (although the timer would need to run for longer than one sub-frame). In this case, this further NACK would be repeated over the same number of sub-frames as the normal ACK/NACKs, and would follow the last repetition of the normal ACK/NACK. This is illustrated in Figure 6 for the case where the number of repeats of each ACK/NACK is set at 1.

The presence of a data packet is signalled by an indicator signal 302 in the normal way in sub-frame N. A NACK 204 is then transmitted in sub-frames N-2 and N-1 (unless a packet on the downlink data channel in sub-frame N-2 has already been correctly decoded, in which case an ACK 206 is sent in sub-frames N-2 and N-1). If the packet is correctly decoded, then an ACK 206 is sent on the uplink channel 124 in sub-frame N, and repeated in sub-frame N+1. No packet may be transmitted on the downlink data channel in sub-frame N+1. If the packet is not correctly decoded, a NACK 206 is sent on the uplink channel 124 in sub-frame N and repeated in sub-frame N+1. Additionally, according to the use of the timer, a NACK 204 is always sent in sub-frames N+2 and N+3 of the uplink channel 124, unless a packet is correctly decoded from sub-frame N+2 on the downlink data channel, in which case an ACK 206 is sent in sub-frames N+2 and N+3.

It may be desirable to be able to switch transmission of a NACK 206 to indicate reception of an indicator signal 302 on and off by means of signalling from the BS 100. This signalling may be combined with switching on and off the timer for transmission of NACKs 204 after the normal packet acknowledgement (i.e. both aspects switched on or off together), alternatively the two aspects may be switched on and off independently of each other. The switching could be determined by the state of the MS 110, for example whether or not it is in soft handover, or the selected number of repeats of ACKs and NACKs.

One example where it could be desirable to switch off the use of the present invention is if the BS 100 is specifically trying to detect DTX as a separate case from NACK. This may be the case if, for example, different

redundancy versions are used for retransmissions, in which case they cannot be directly combined in the same soft-buffer at the MS 110. This would not, however, present a problem if Chase combining were used.

Simulation results showing the benefit (in terms of peak uplink channel
5 124 power requirement of the present invention, combined with a 1-sub-frame
timer, are shown in Figure 7. This is a graph of P, the peak uplink power
requirement relative to the normal uplink (DPCCH) transmission power, in dB
against V, the speed of the MS 110 in km/h. In this simulation the overall
probability of mis-detecting DTX as ACK 206 is required to be 0.01. Power
10 requirements without an initial NACK or subsequent timer are shown as a solid
line, and requirements with an initial NACK and subsequent one sub-frame
duration timer are shown as a dashed line. It can be seen that use of the two
techniques together provides a benefit of between 3 and 6dB.

The operation of such a combined scheme is summarised by the flow
15 chart shown in Figure 8. The method starts, at step 802, when the MS 110 is
ready to receive data packets 202. Test 804 relates to the MS 110 determining
whether an indicator signal 302 for a data packet has been received. If it has,
the MS 110 transmits, at step 806, a negative acknowledgement and proceeds
to receive the data packet. Test 808 relates to the MS 110 determining
20 whether the data packet has been received successfully. If a data packet 202
is received test 808 is passed, the timer is reset, at step 810, an
acknowledgement 206 is transmitted, at step 812, and the MS 110 returns to
test 804 to check for an indicator signal 302. Resetting the timer may involve
starting a timer, if one is not already running, or restarting an already-running
25 timer.

If the data packet is not successfully received, test 808 is failed and a
further test 814 is made to determine whether the timer is running. If the timer
is running, the test 814 is passed and the MS 110 transmits, at step 816, a
negative acknowledgement 204 in the corresponding ACK/NACK field, then
30 returns to test 804. If the timer is not running, test 814 is failed and the MS 110
returns directly to test 804.

The above description is aimed at UMTS FDD (Frequency Division Duplex) mode. The invention could also be applied to TDD (Time Division Duplex) mode. In this case the fact that the uplink and downlink channel use different time slots at the same frequency (i.e. reciprocal channel) could
5 reduce the need for signalling of channel information.

The description above related to the BS 100 performing a variety of roles relating to the present invention. In practice these tasks may be the responsibility of a variety of parts of the fixed infrastructure, for example in a "Node B", which is the part of the fixed infrastructure directly interfacing with a
10 MS 110, or at a higher level in the Radio Network Controller (RNC). In this specification, the use of the term "base station" or "primary station" is therefore to be understood to include the parts of the network fixed infrastructure involved in an embodiment of the present invention.

From reading the present disclosure, other modifications will be
15 apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of communication systems and component parts thereof, and which may be used instead of or in addition to features already described herein.

In the present specification and claims the word "a" or "an" preceding an
20 element does not exclude the presence of a plurality of such elements. Further, the word "comprising" does not exclude the presence of other elements or steps than those listed.

CLAIMS

1. A communication system having a downlink indicator channel for the transmission of a indicator signal indicating that a data packet is scheduled to be transmitted on a downlink data channel from a primary station to a secondary station, the secondary station having receiving means for receiving the indicator signal and the data packet, and acknowledgement means for transmitting a signal to the primary station to indicate the status of the received data packet, wherein the secondary station comprises means for transmitting on an uplink channel a status signal to indicate receipt of the indicator signal before transmission of a positive or negative acknowledgement to indicate the status of the received data packet.

2. A system as claimed in claim 1, characterised in that the status signal is the same signal as that used for a negative acknowledgement.

3. A primary station for use in a communication system having a a downlink indicator channel for the transmission of a indicator signal indicating that a data packet is scheduled to be transmitted on a downlink data channel from the primary station to a secondary station, wherein means are provided for receiving on an uplink channel a status signal from the secondary station to indicate receipt of the indicator signal before reception of a positive or negative acknowledgement to indicate the status of the data packet received by the secondary station.

4. A primary station as claimed in claim 3, characterised in that the status signal is the same signal as that used for a negative acknowledgement.

5. A secondary station for use in a communication system having a downlink indicator channel for the transmission of a indicator signal indicating that a data packet is scheduled to be transmitted on a downlink data channel from a primary station to the secondary station, wherein receiving means are

provided for receiving the indicator signal and the data packet, acknowledgement means are provided for transmitting on an uplink channel a signal to the primary station to indicate the status of the received data packet, and means are provided for transmitting a status signal to indicate receipt of the indicator signal before transmission of a positive or negative acknowledgement to indicate the status of the received data packet.

5 6. A secondary station as claimed in claim 5, characterised in that the status signal is the same signal as that used for a negative acknowledgement.

7. A secondary station as claimed in claim 5 or 6, characterised in that the status signal is transmitted at the same power as a positive acknowledgement.

15

8. A secondary station as claimed in any one of claims 5 to 7, characterised in that means are provided for resetting a timer on receipt of the indicator signal and for modifying a characteristic of uplink transmissions until the timer expires.

20

9. A secondary station as claimed in claim 8, characterised in that means are provided for transmitting a negative acknowledgement for each time at which a data packet could have been transmitted if no transmission of a data packet is detected, and in that such negative acknowledgements are only transmitted until the timer expires.

25

10. A secondary station as claimed in claim 8 or 9, characterised in that the timer has a duration of one sub-frame.

11. A secondary station as claimed in claim 9, characterised in that means are provided for transmitting a positive or negative acknowledgement of

30

15

PHGB 020134

a received data packet N times, where N is predetermined, and for transmitting subsequent negative acknowledgements until the timer expires.

12. A secondary station as claimed in claim 11, characterised in that
5 the timer has a duration of N sub-frames.

13. A secondary station as claimed in any one of claims 5 to 12,
characterised in that means are provided for transmitting a plurality of status
signals before transmission of the acknowledgement.

10

14. A method of operating a communication system having a
downlink indicator channel for the transmission of a indicator signal indicating
that a data packet is scheduled to be transmitted on a downlink data channel
from a primary station to a secondary station, the method comprising the
15 secondary station receiving the indicator signal and the data packet, and
transmitting on an uplink channel a status signal to indicate receipt of the
indicator signal before transmission of a positive or negative acknowledgement
to indicate the status of the received data packet.

20 15. A radio communication system constructed and arranged to
operate substantially as hereinbefore described with reference to and as
shown in the accompanying drawings.

25 16. A primary station constructed and arranged to operate
substantially as hereinbefore described with reference to and as shown in the
accompanying drawings.

30 17. A secondary station constructed and arranged to operate
substantially as hereinbefore described with reference to and as shown in the
accompanying drawings.

18. A method of operating a radio communication system substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

ABSTRACT**COMMUNICATION SYSTEM**

5 A communication system comprises a downlink indicator channel (DL₁)
for the transmission of a indicator signal (302) indicating that a data packet
(202) is scheduled to be transmitted on a downlink data channel (DL₂) from a
primary station to a secondary station. In operation, on detection of the
indicator signal, the secondary station transmits a status signal, for example a
10 negative acknowledgement signal (204), on an uplink channel (UL) to the
primary station immediately before transmission of a positive (206) or negative
acknowledgement signal to indicate the status of the received data packet. By
providing the primary station with two chances to detect the case where the
secondary station fails to detect the indicator signal, peak power requirements
15 of the uplink channel can be reduced, thereby reducing system interference
levels.

(Figure 5)

1/5

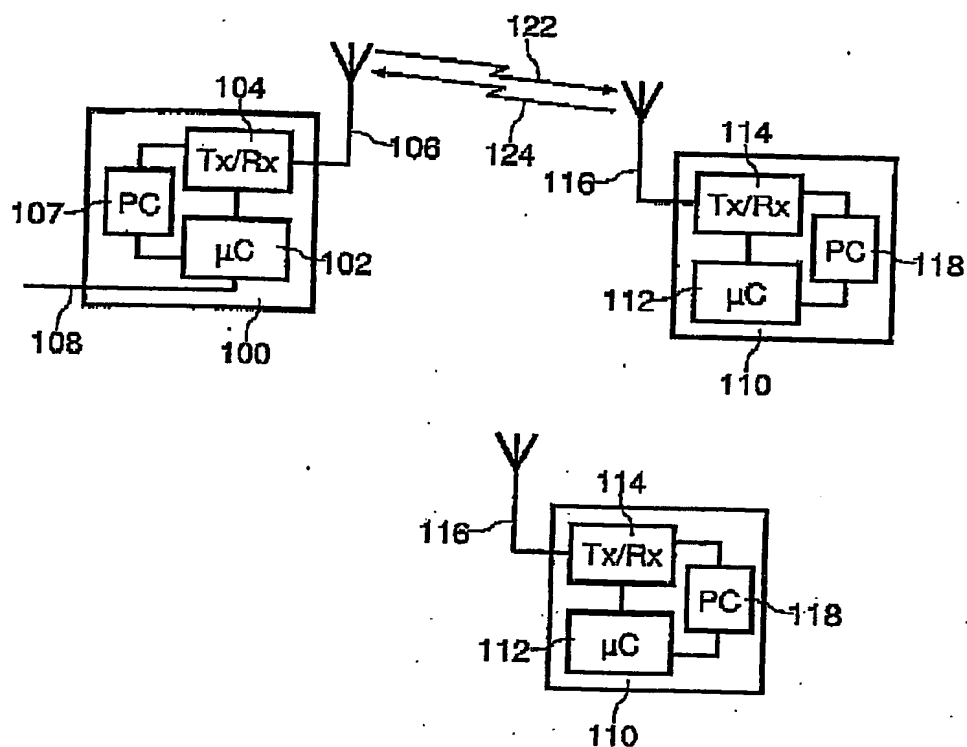


FIG. 1

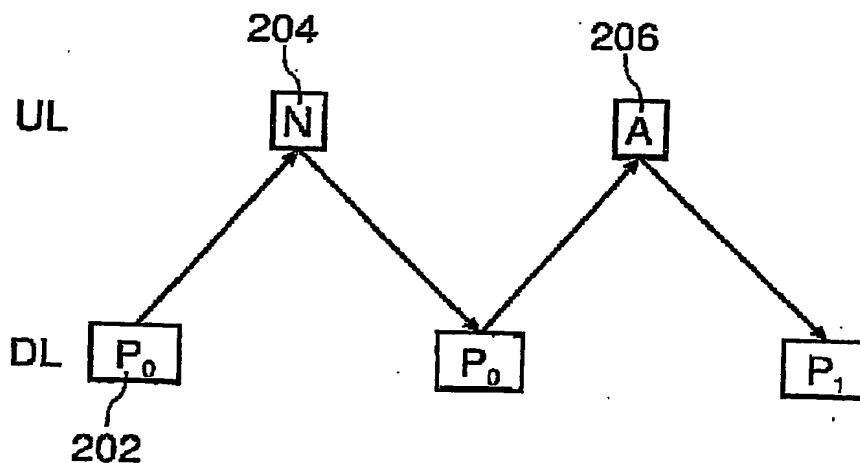


FIG. 2

2/5

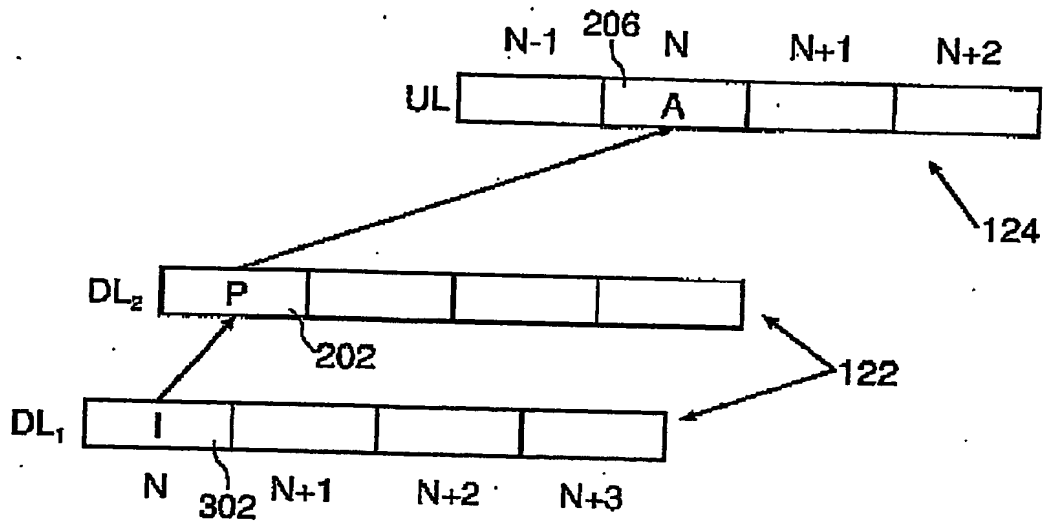


FIG. 3

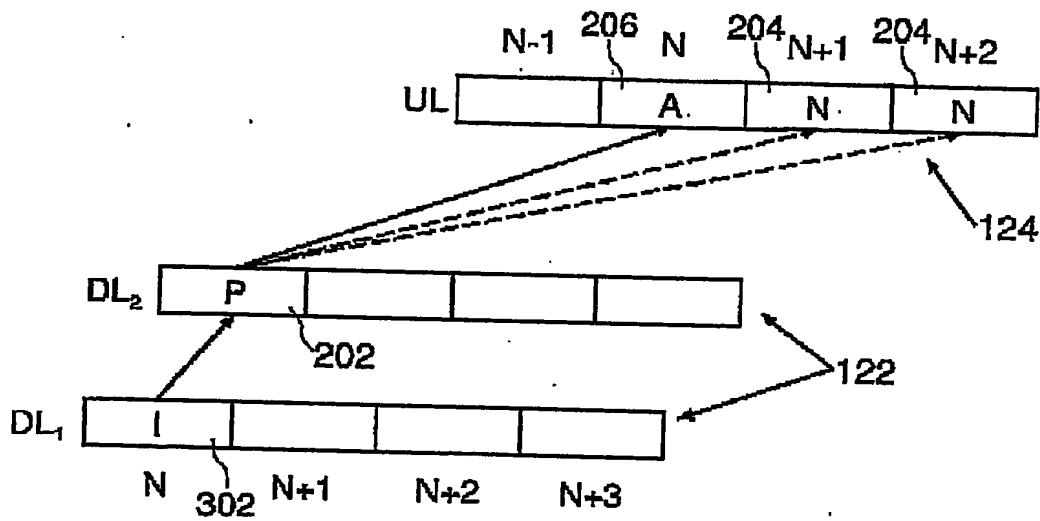


FIG. 4

3/5

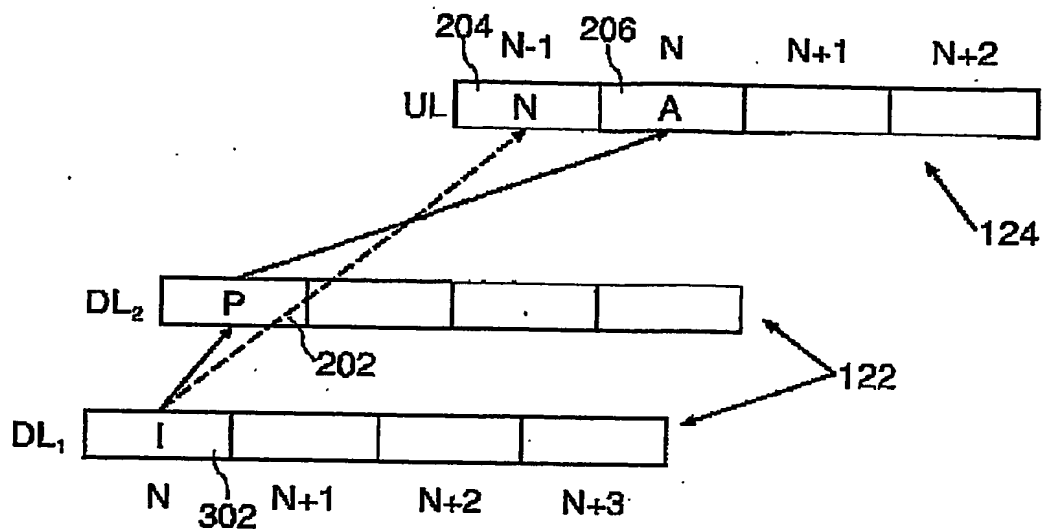


FIG. 5

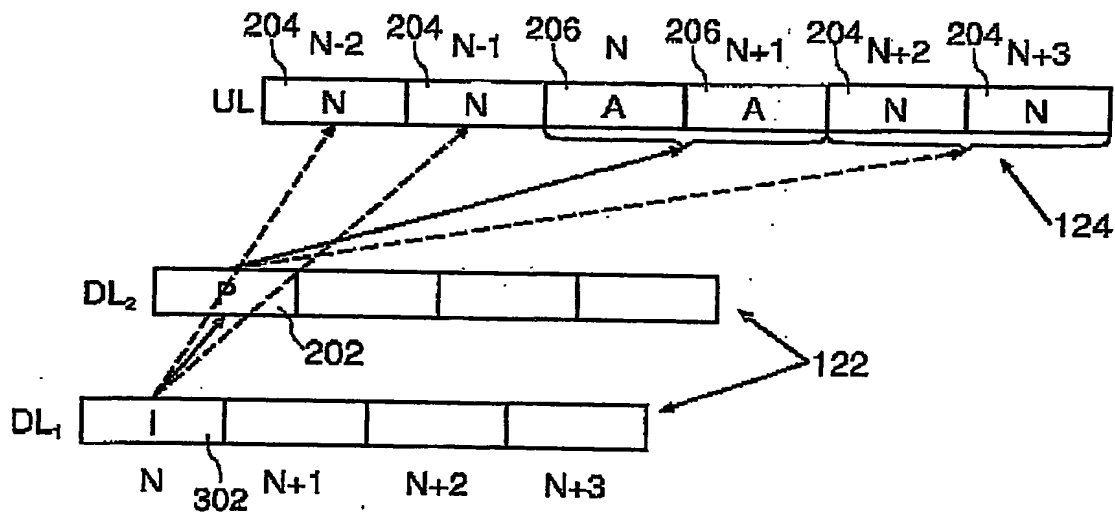


FIG. 6

4/5

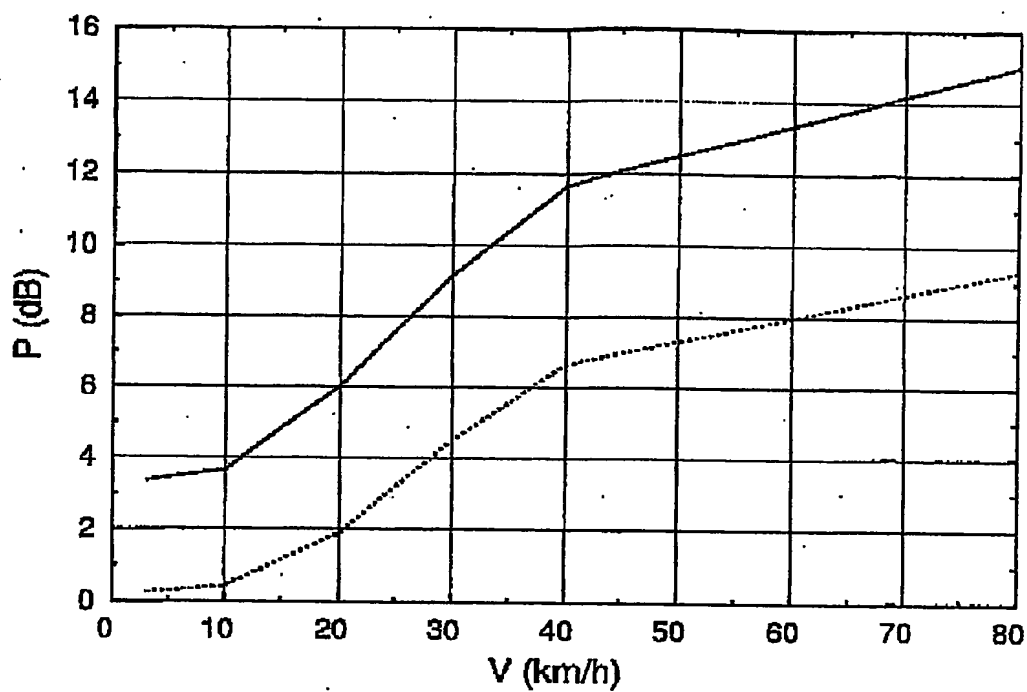


FIG. 7

5/5

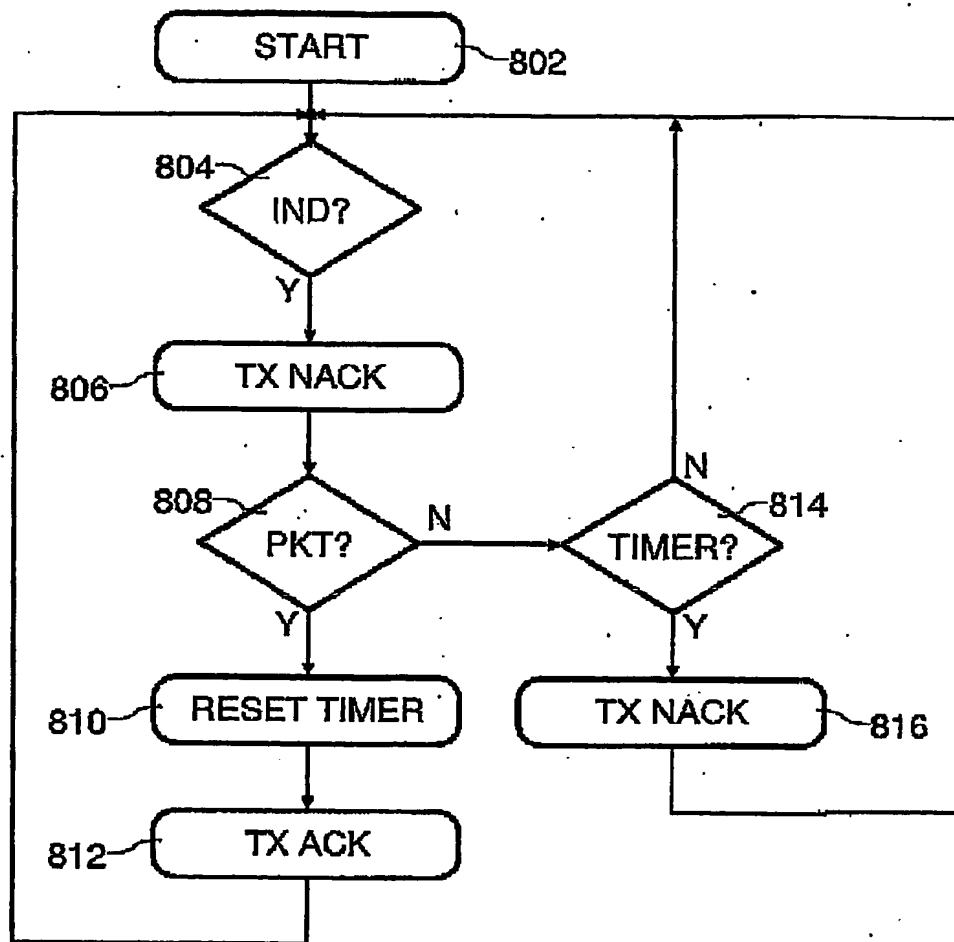


FIG. 8

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☒ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☒ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.